


CYBER


COLOUR 2315-01701

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

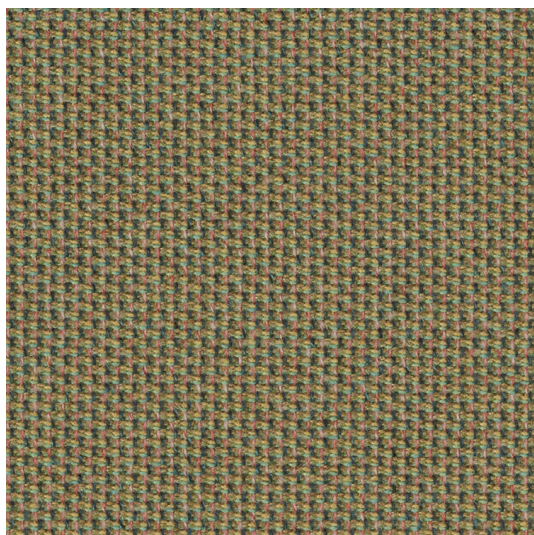

COLOUR SCALE

Design no. 2315 Cyber (140 cm/55") is available in 27 colours

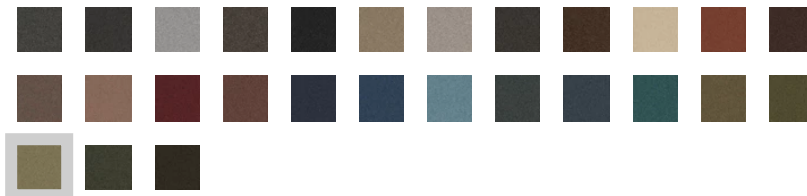

Cyber is a multi-coloured, 100% recycled post-consumer polyester fabric with a modern, dynamic expression and textural depth and dimension. The fabric's surprising colour combinations, soft suede-like tactility, matt finish, and natural fibre look set it apart and bring a warm, residential, and creative vibe to all types of collaborative and flexible workspaces.

100% recyclable polyester
Meets Möbelfakta requirements

Designed by: Cenk Kivrikoglu
Colours designed by: Gabriel Design Team

ORDER

Please sign in to order fabrics and samples.



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2315 – Cyber

Application

Upholstery

Composition

100% Post-consumer recycled polyester

Weight

170 g/lm – 18.39 oz/lin.yd

PERFORMANCE

Abrasion

120,000 – rubs martindale (EN ISO 12947-2)

100,000 – double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 – scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

7-8 – scale 1-8, max. 8 (EN ISO 105-B02)

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

[OEKO-TEX® STANDARD 100](#)

[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M7.1](#)

Potential environmental impacts

[Environmental Product Declaration \(EPD\)](#)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021 1&2 Cigarette and Match](#)

[CA TB 117-2013](#)

[BS 5852 Crib 5 \(option flame retardant\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [AATCC 8 or 116 Dry/wet crocking](#)

 [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28511885	24 Aug 2021	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		21-004961	20 Aug 2021	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28511885	24 Aug 2021	PDF
ASTM D3511 Pilling		21-004961	20 Aug 2021	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

ABRASION RESISTANCE

BS EN ISO 105 B02 Method 2	2021AN1860	01 Sep 2021	PDF
AATCC 16 Light fastness	2021AN1861	20 Aug 2021	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		28511885	24 Aug 2021	PDF
AATCC 8 or 116 Dry/wet crocking		21-004961	20 Aug 2021	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28511885	24 Aug 2021	PDF
ASTM D4034 Yarn slippage at a sewn seam		21-004961	20 Aug 2021	PDF

COLOUR FASTNESS TO PERSPIRATION

Test	Condition	No.	Date	Download
BS EN ISO 105-E04		28511885	24 Aug 2021	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 7M 74 C PC Flat dry		2021AN2268	21 Oct 2021	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		21-004961	20 Aug 2021	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/58484/04/21	06 May 2021	PDF

ABRASION RESISTANCE

BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/58868A/08/21	24 Aug 2021	PDF
CA TB 117-2013		21-004961	20 Aug 2021	PDF

FLAMMABILITY WITH FLAMERETARDANT TREATMENT

Test	Condition	No.	Date	Download
BS 5852 Crib 5 (option flame retardant)	35 kg/m3 CMHR foam	23/61362G/09/23	11 Dec 2024	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		392-2025-00484401	09 Oct 2025	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		22 Nov 2021	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

POTENTIAL ENVIRONMENTAL IMPACTS

Test	Condition	No.	Date	Download
Environmental Product Declaration (EPD)			23 Jul 2025	PDF

--

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Cyber is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.0%



74°C shrinkage max 2.5%
